





Decorative Flake Blends

Flakes are broadcast to rejection over pigmented coatings and overlays for full flake flooring systems. These same flake blends can be used for random flake flooring systems as well.

1/4" flake mix shown

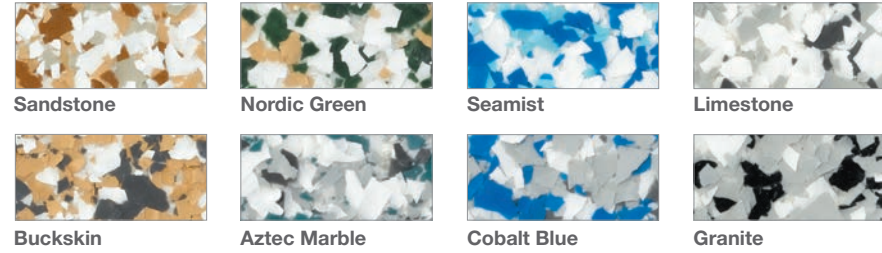

1/8" flake mix shown

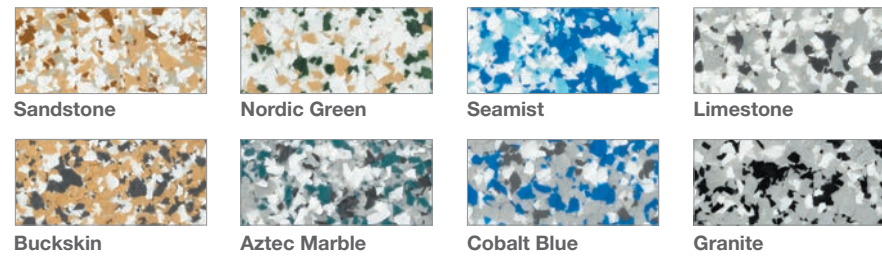

Custom Flake Colors and Blends

Select individual flake colors and mix to create your desired blend:

- Multiple flake sizes available (1", 5/8", 3/8", 1/4", 1/8", 1/16", and 1/32").
- Access to a color library with more than 2,000 unique solid color formulations.
- Unlimited color matching capability - Simply show us your desired color scheme and we can provide the colors you want.

Custom flake blends are available upon request. Contact your local BASF representative for more information.

BASF recommends that the base resin pigment selected be similar in color to one of the flake colors in the blend. Single color flake systems or mixes with more than 50% Eggshell White are not recommended.



Performance Flooring Color Portfolio and Selection Guide

Master Builders Solutions from BASF

The Master Builders Solutions brand brings all of BASF's expertise together to create chemical solutions for new construction, maintenance, repair and renovation of structures. Master Builders Solutions is built on the experience gained from more than a century in the construction industry.

The know-how and experience of a global community of BASF construction experts form the core of Master Builders Solutions. We combine the right elements from our portfolio to solve your specific construction challenges. We collaborate across areas

of expertise and regions and draw on the experience gained from countless construction projects worldwide. We leverage global BASF technologies, as well as our in-depth knowledge of local building needs, to develop innovations that help make you more successful and drive sustainable construction. The comprehensive portfolio under the Master Builders Solutions brand encompasses concrete admixtures, cement additives, chemical solutions for underground construction, waterproofing solutions, sealants, concrete repair and protection solutions, performance grouts and performance flooring solutions.

Master Builders Solutions products from BASF for the Construction Industry:

| | | |
|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| MasterAir® Solutions for air-entrained concrete | MasterKure® Solutions for concrete curing | MasterSet® Solutions for retardation control |
| MasterBrace® Solutions for concrete strengthening | MasterLife® Solutions for enhanced durability | MasterSure® Solutions for workability control |
| MasterCast® Solutions for manufactured concrete product industry | MasterMatrix® Advanced rheology control solutions for self-consolidating concrete | MasterTop® Solutions for industrial and commercial floors |
| MasterCem® Solutions for cement manufacture | MasterPel® Solutions for water tight concrete | MasterWeld® Solutions for construction adhesives |
| MasterEmaco® Solutions for concrete repair | MasterPolyheed® Solutions for high-performance concrete | Ucrete® Flooring solutions for harsh environments |
| MasterFinish® Solutions for formwork treatment | MasterPozzolith® Solutions for water-reduced concrete | Available at: |
| MasterFlow® Solutions for precision grouting | MasterProtect® Solutions for concrete protection | |
| MasterFiber® Comprehensive solutions for fiber reinforced concrete | MasterRheobuild® Solutions for super-plasticized concrete | |
| MasterGlenium® Solutions for high-performance concrete | MasterRoc® Solutions for underground construction | |
| MasterInject® Solutions for concrete injection | MasterSeal® Solutions for waterproofing and sealing | |

BASF Corporation
Construction Systems
889 Valley Park Drive
Shakopee, MN 55379 USA
Customer Service 1(800)433-9517
Technical Service 1(800)243-6739
master-builders-solutions.basf.us



® = Registered trademark of the BASF-Group in many countries.
© 2016 BASF Corporation 1031439 rev 01/2016




LIMITED WARRANTY NOTICE: BASF warrants this product to be free from manufacturing defects and to meet the technical properties on the current Technical Data Guide, if used as directed within shelf life. Satisfactory results depend not only on quality products but also upon many factors beyond our control. BASF MAKES NO OTHER WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO ITS PRODUCTS. The sole and exclusive remedy of Purchaser for any claim concerning this product, including but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is shipment to purchaser of product equal to the amount of product that fails to meet this warranty or refund of the original purchase price of product that fails to meet this warranty, at the sole option of BASF. Any claims concerning this product must be received in writing within one (1) year from the date of shipment and any claims not presented within that period are waived by Purchaser. BASF WILL NOT BE RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL, (INCLUDING LOST PROFITS) OR PUNITIVE DAMAGES OF ANY KIND.

Purchaser must determine the suitability of the products for the intended use and assumes all risks and liabilities in connection therewith. This information and all further technical advice are based on BASF's present knowledge and experience. However, BASF assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights, nor shall any legal relationship be created by or arise from the provision of such information and advice. BASF reserves the right to make any changes according to technological progress or further developments. The Purchaser of the Product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with a full application of the product(s). Performance of the product described herein should be verified by testing and carried out by qualified experts.




Ucrete®


Ucrete® Colors
(For use in all Ucrete flooring systems including DP Topcoat)

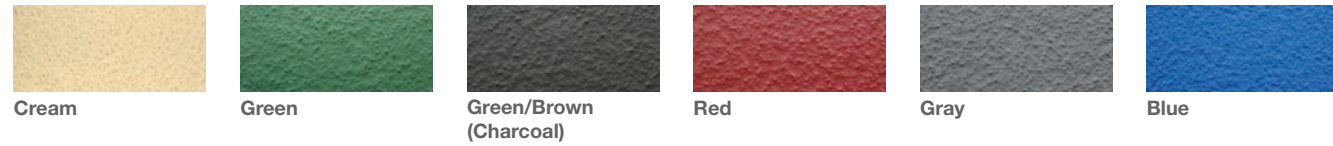


Ucrete® Decorative Quartz Aggregate Blends



MasterTop® TC 493 Colors

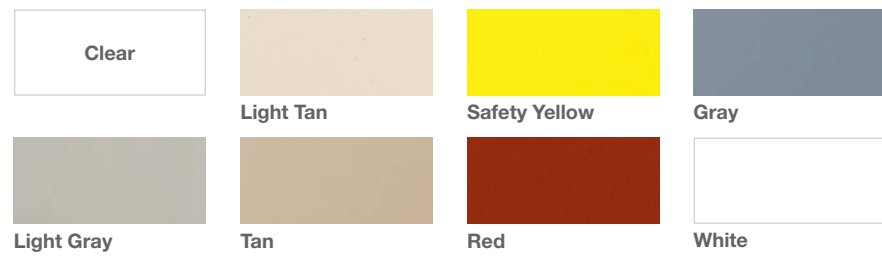


MasterTop® TC 565 Colors

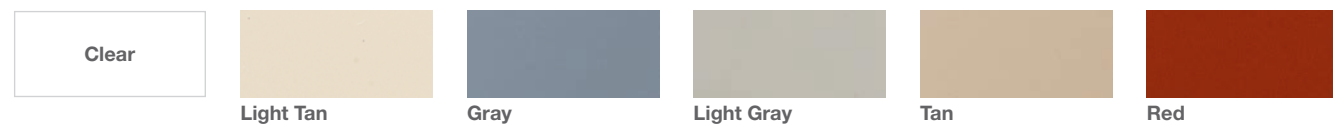

MasterTop® TC 570 CR Colors




MasterTop® TC 683 Colors

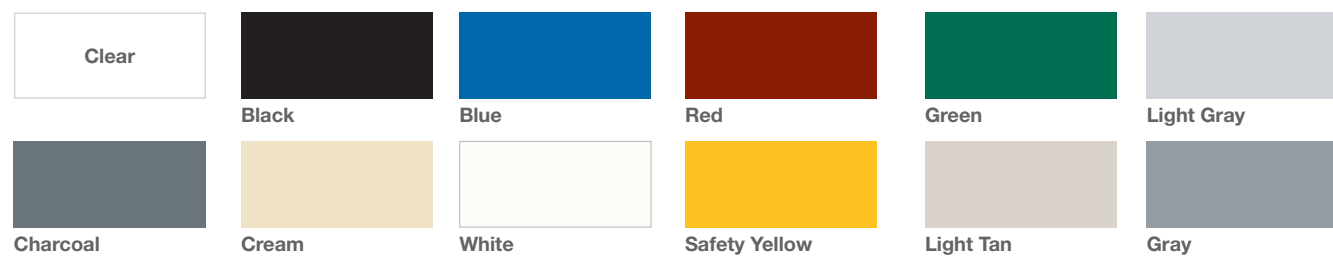

MasterTop® SRS

MasterTop® PGM 155 Colors
(For use in MasterTop MMA based flooring systems)

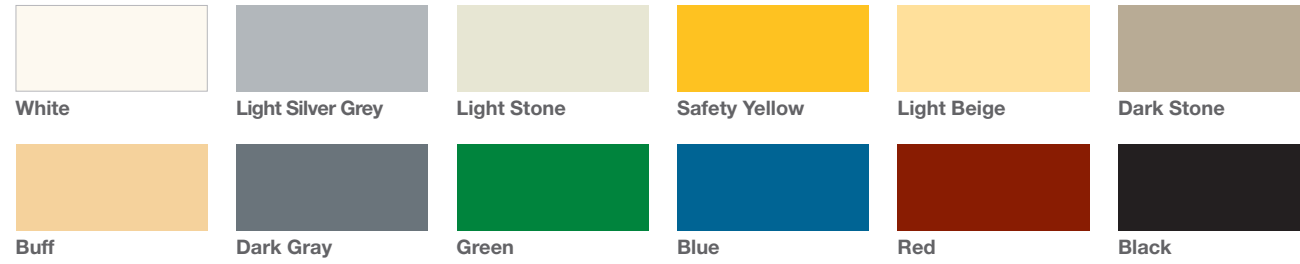

MasterTop® SRS Quartz Aggregate Blends



All of the color reproductions are intended to provide an indication of color. Actual color and texture of products may vary from those shown in this brochure. Applied samples and test patches are recommended for color matching and final approvals for all BASF Performance Flooring products. Contact your BASF representative for further information.


Custom colors are available for select resins and systems. Contact your local BASF representative for more information.




MasterTop® Coatings

Epoxy, Polyurethane and Polyaspartic Options


MasterTop® PGM 500 Pigment Pack Colors (For use in MasterTop epoxy flooring systems)

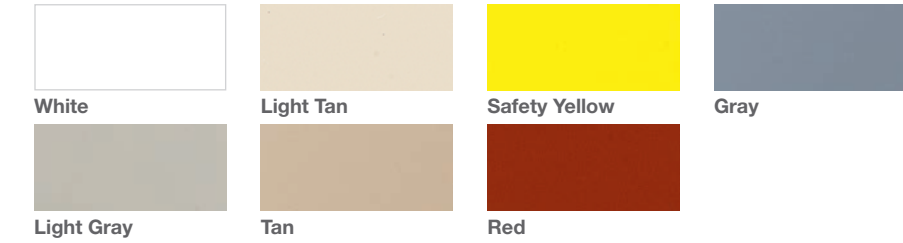

MasterTop® TC 493 Colors

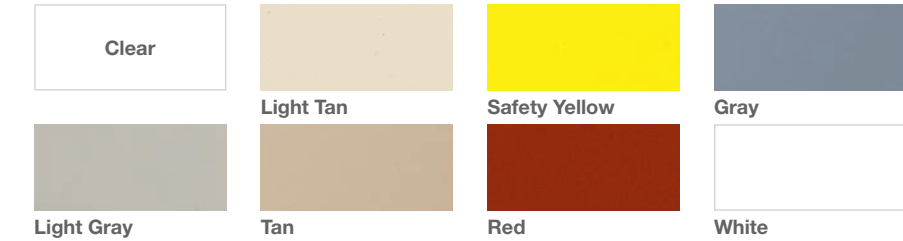


MasterTop® TC 565 Colors

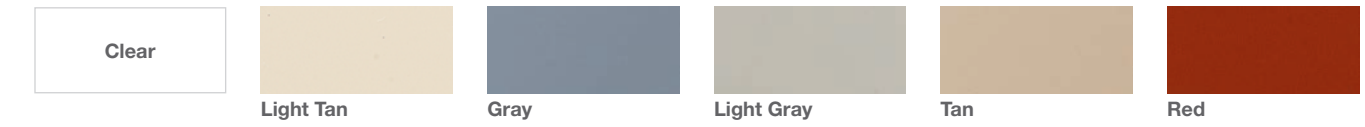

MasterTop® TC 570 CR Colors



MasterTop® TC 683 Colors

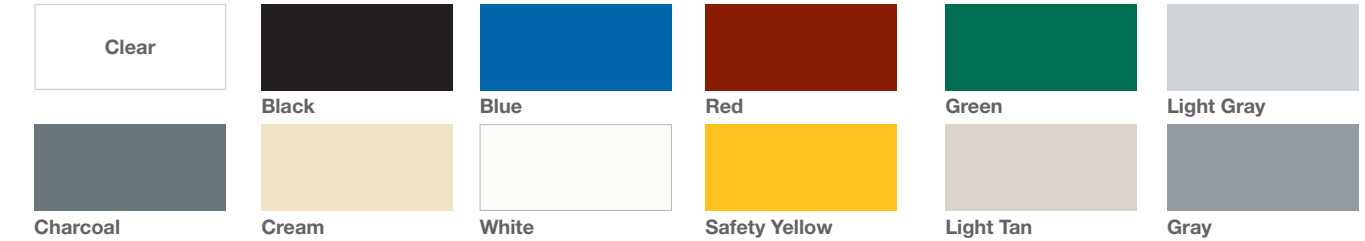

MasterTop® Decorative Quartz Aggregate Blends

